


# Slewing ring · KDL 900

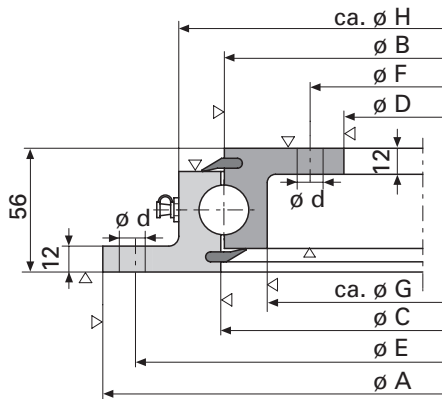

▽ = Shaped profile

## Specification

- E-coating
- Low-maintenance
- Drilled/Undrilled
- Special drill templates available upon request
- Hardened bearings
- Lubricant dispenser (optional)
- Splined bolts (optional)

## Selection table / Versions available

Order No.	Permitted axial load (kN)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Hole diameter (ø d)	Number of holes on outer ring (na)	Number of holes on inner ring (ni)	G (mm)	H (mm)	Weight (approx. kg)
KDL 900-1 W	40	520	409	412	302	490	332	-	-	-	371	451	25
KLKKW91B13100	40	520	409	412	302	490	332	18	8	12	371	451	25
KDL 900-2 W	80	650	539	542	432	620	462	-	-	-	501	581	32
KLKKW92B23100	80	650	539	542	432	620	462	18	10	14	501	581	32
KDL 900-3 W	120	750	639	642	532	720	562	-	-	-	601	681	39
KLKKW93B33100	120	750	639	642	532	720	562	18	12	16	601	681	39
KDL 900-4 W	150	850	739	742	632	820	662	-	-	-	701	781	45
KLKKW94B43100	150	850	739	742	632	820	662	18	12	16	701	781	45
KDL 900-5 W	180	950	839	842	732	920	762	-	-	-	801	881	51
KLKKW95B53100	180	950	839	842	732	920	762	18	14	18	801	881	51
KDL 900-6 W	210	1050	939	942	832	1020	862	-	-	-	901	981	57
KLKKW96B63400	210	1050	939	942	832	1020	862	18	16	20	901	981	57
KDL 900-7 W	250	1200	1089	1092	982	1170	1012	-	-	-	1051	1131	67
KLKKW97B73400	250	1200	1089	1092	982	1170	1012	18	16	20	1051	1131	67

